

SPECIFICATIONS AND PERFORMANCE

1" BSP (25mm) ALUMINIUM / CAST IRON



MOCs Also Available: PP, PVDF, SS 316

18

- Max Flow Rate:** 135Lpm (34gpm)
- Port Size:**
 - Inlet:** 25.40mm (1" BSP)
 - Discharge:** 25.40mm (1" BSP)
 - Air Inlet:** 9.53mm (3/8" BSP)
 - Air Exhaust:** 12.70mm (1/2" BSP)
- Suction Lift:**
 - Dry:** 3.05m (10')
 - Wet:** 4.89m (16')
- Teflon:**
 - Dry:** 2.14m (7')
 - Wet:** 3.98m (13')
- Max Particle Size (Dia):** 3.17mm (0.125")



AOD 300 AL Bolted


ALSO AVAILABLE IN CAST IRON



AOD 300 CI Bolted

PERFORMANCE

AOD 300 | 1" (25mm)

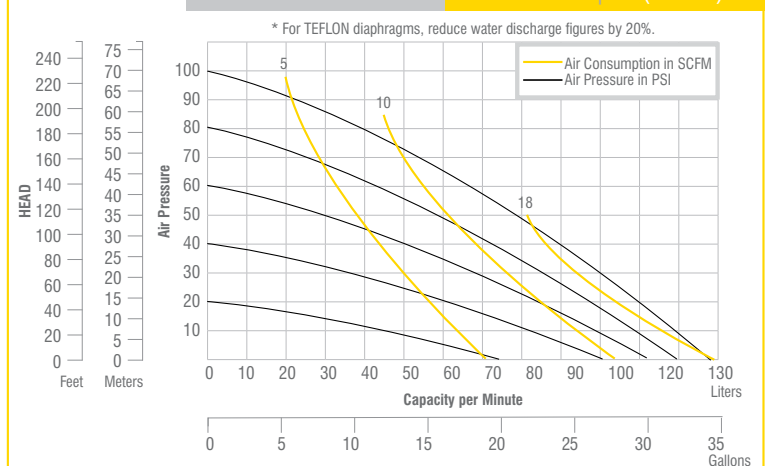

- PRICE ADD-ON ACCESSORIES:** Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •