



PB - PB1 45



PB 45



PB1 45

IT. Elettropompa per Gasolio

Elettropompe a 12 o 24V costituite da un motore a magneti permanenti solido e robusto in grado di garantire elevata affidabilità anche in condizioni di utilizzo a basse temperature. Pompa a palette autoadescante costituita da corpo in ghisa, girante in acciaio sinterizzato e palette in resina acetilica. Valvola by pass e il filtro in acciaio inox integrati. Il modello PB1 comprende interruttore ON/OFF di facile accesso, alloggiato nella parte superiore della maniglia per il trasporto, cavo 4m con pinze e fusibile di protezione. Staffa di supporto fornita per il fissaggio della pompa.

Caratteristiche

- portata 45 l/min
- entrata/uscita 1" BSP-G
- maniglia(PB1) sì
- fluidi diesel

EN. Electricpumps for Diesel

12 or 24 Volts electric pump featuring a motor with permanent magnets. Solid and sturdy, it is able to ensure high reliability even at low temperatures. Vane self-priming pump in cast iron, with sintered steel rotor and acetal resin vanes. Built-in by-pass valve and stainless steel filter. Model PB1 features a easy-to-access ON/OFF switch located on top of the carry handle, 4m cable with clamps and safety fuse. Support bracket supplied for pump fastening.

Features

- flow rate 45 l/min
- in/out 1" BSP-G
- handle (PB1) yes
- fluids diesel




ciclo di lavoro - duty cycle



Kit Riparazione

Repair kit
ref. KITBY40-45
ref. KIT45-60

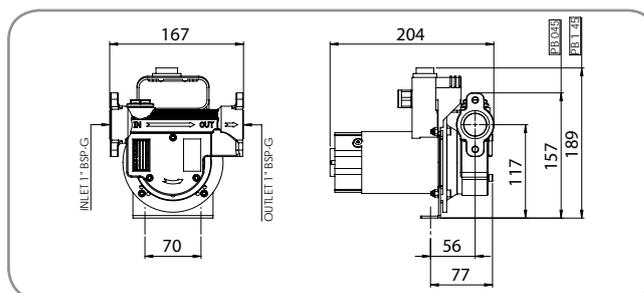

Ref.	Model	l/min	V	A		LxWxH(mm)	Kg	N° boxes europallet	N° boxes europallet
PB0452000	PB 45	45	12	24	-	290X190X210	4,8	80	80
PB0454000	PB 45	45	24	9	-	290X190X210	4,8	80	80
PB1452200	PB1 45	45	12	24	2m	290X190X210	5,2	80	80
PB1454200	PB1 45	45	24	9	2m	290X190X210	5,2	80	80
PB1452400	PB1 45	45	12	24	4m	290X190X210	5,4	80	80
PB1454400	PB1 45	45	24	9	4m	290X190X210	5,4	80	80



PB-PB1 60



PB 60



PB1 60

IT. Elettropompa per Gasolio

Elettropompe a corrente continua 12V o 24V ad alta portata, costituite da un motore a magneti permanenti solido e robusto in grado di garantire elevata affidabilità anche in condizioni di utilizzo a basse temperature. Pompa a palette autoadescante costituita da corpo in ghisa, girante in acciaio sinterizzato e palette in resina acetaleica. Valvola by pass e il filtro in acciaio inox integrati. Il modello PB1 comprende interruttore ON-OFF ed è dotato di maniglia per un facile trasporto; cavo 4m con pinze e fusibile di protezione.

EN. Electricpumps for Diesel

12 or 24 V high flow rate electric pump equipped with solid permanent magnet motor, extremely reliable even at low temperatures. Self-priming vane pump with cast iron body, sintered steel rotor and acetal resin vanes. PB1 is equipped built-in by pass valve, stainless steel filter, on/off switch and a carry handle. It also features a 4m cable and a safety fuse.

Caratteristiche

- portata
- entrata/uscita
- maniglia (PB1)
- fluidi

60

- 60 l/min
- 1" BSP-G
- sì
- diesel

85

- 85 l/min
- 1" BSP-G
- sì
- diesel

Features

- flow rate
- in/out
- handle (PB1)
- fluids



60

- 60 l/min
- 1" BSP-G
- yes
- diesel



85

- 85 l/min
- 1" BSP-G
- yes
- diesel

PB1 60

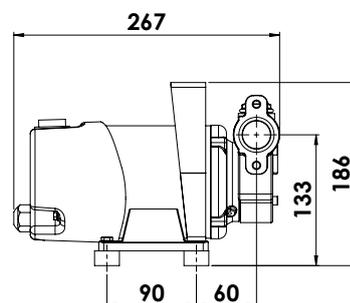

PB1 85

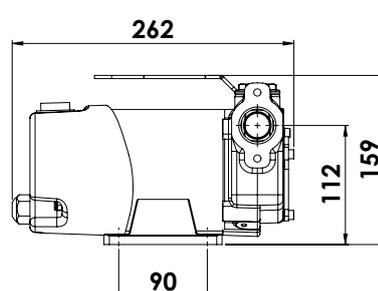



PB-PB1 85



PB1 85



PB 85



ciclo di lavoro - duty cycle



Kit Riparazione 60L
Repair kit
ref. KITBY60-80-100
ref. KIT45-60



Kit Riparazione 85L
Repair kit
ref. KITBY60-80-100
ref. KIT80-100



Ref.	Model	l/min	V	A		LxWxH(mm)	Kg	N° boxes europallet	N° boxes europallet
PB0602000	PB 60	60	12	26	-	290X190X250	8,0	80	80
PB0604000	PB 60	60	24	17	-	290X190X250	8,0	80	80
PB1602400	PB1 60	60	12	26	4m	290X190X210	9,5	80	80
PB1604400	PB1 60	60	24	17	4m	290X190X210	9,5	80	80
PB0852000	PB 85	85	12	40	-	290X190X210	8,5	80	80
PB0854000	PB 85	85	24	32	-	290X190X210	8,5	80	80
PB1852400	PB1 85	85	12	40	4m	290X190X210	10,0	80	80
PB1854400	PB1 85	85	24	32	4m	290X190X210	10,0	80	80