

SPECIFICATIONS AND PERFORMANCE

1/2" BSP (15mm) POLYPROPYLENE / PVDF



MOCs Also Available: SS 316, AL

- Max Flow Rate:** 23Lpm (6gpm)
- Port Size:** Inlet: 12.70mm (1/2" BSP)
Discharge: 12.70mm (1/2" BSP)
Air Inlet: 6.35mm (1/4" BSP)
Air Exhaust: 12.70mm (1/2" BSP)
- Suction Lift:** Dry: 1.45m (4.75')
Wet: 2.83m (9.28')
- Teflon:** Dry: 0.50m (1.64')
Wet: 0.90m (2.95')
- Max Particle Size (Dia):** 2mm (0.078")



AOD 150 PP Bolted




AOD 15 PP Clamped

CLAMPED model available for specific applications

ALSO AVAILABLE IN PVDF




AOD 150 PVDF Bolted



AOD 15 PVDF Clamped

CLAMPED model available for specific applications

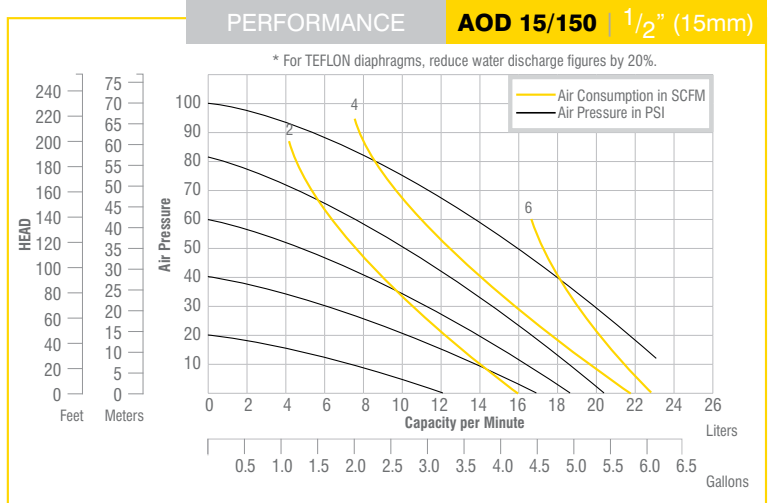

- PRICE ADD-ON ACCESSORIES:** Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •