

# SPECIFICATIONS AND PERFORMANCE

## 1 1/2" BSP (40mm) ALUMINIUM / CAST IRON

MOCs Also Available: PP, PVDF, SS 316



**Max Flow Rate:** 270Lpm (72gpm)  
**Port Size:** Inlet: 38.10mm (1 1/2" BSP)  
 Discharge: 38.10mm (1 1/2" BSP)  
 Air Inlet: 9.64mm (3/8" BSP)  
 Air Exhaust: 12.70mm (1/2" BSP)

**Suction Lift:** Dry: 4.57m (15')  
 Wet: 7.62m (25')

**Teflon:** Dry: 3.05m (10')  
 Wet: 6.09m (20')

**Max Particle Size (Dia):** 4.76mm (0.188")



**AOD 40 AL Clamped**


### ALSO AVAILABLE IN CAST IRON



**AOD 40 CI Clamped**

### PERFORMANCE

### AOD 40 | 1 1/2" (40mm)

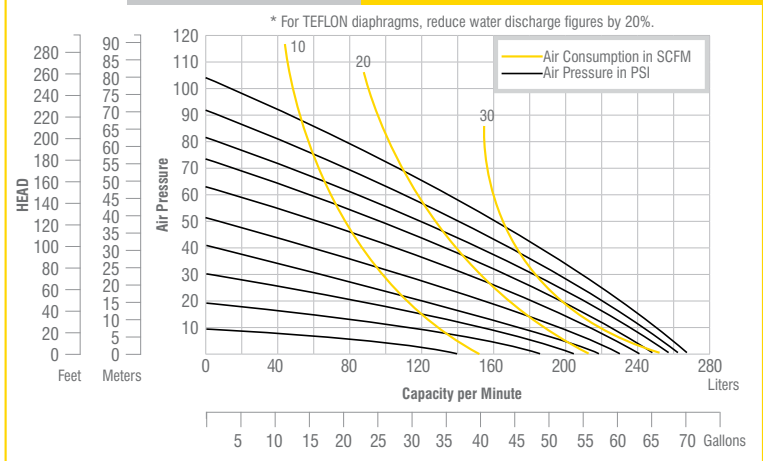

**PRICE ADD-ON ACCESSORIES:** Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •