



Experts in water.

DAVEY

APPLICATIONS

- Water supply
- Water transfer
- Hosing down - dairies, factory floors etc.
- Tank filling
- Sprinkler supply
- Garden reticulation



Dynaflo® 6000 Series

6200 & 6210

Single Stage Pump

Model Numbers:

62001-3, 62101-3 & 62103-2

Rugged economical single stage centrifugal pumps.
Designed for total heads to 32 m and flow to 315 lpm.

Also available in 220 Volt 60Hz single phase and 380 Volt 60Hz three phase.

WHY CHOOSE THE Davey Dynaflo® Single Stage Pump?

Every pump is performance and pressure tested in our factory to ensure quality and reliability.

Noryl pump casing with metal hoop strengthened inlet and outlet ports is a proven robust pump design for long life.

O-ring sealed hand tightened priming and drain plugs for easy operation.

304 stainless steel pump shaft for long life.

Davey manufactured IP56-TEFC, 2 pole motor is corrosion resistant and protects against vermin, dust and water.

Motor and pump are designed for frequent starts providing a long and reliable working life.

In-built thermal overload protection with automatic reset in all single phase models for long term motor protection.

Double contact seal, C3, high temperature greased bearings for long life and smooth running.

2m power lead with 10amp Australian three pin plug fitted to all single phase models.

Corrosion resistant motor mounting feet for long life.



OPERATING LIMITS

Type	6200	6210
Capacities to	270 lpm	270 lpm
Maximum total head	25.5m	31.6m
Maximum suction head	7.0m	
Maximum water temperature		
– Continuous	50°C	
– 10 minute peak	70°C	
Minimum water temperature	1°C	
Inlet size	1½" BSP(F)	
Outlet size	1¼" BSP(F)	
Maximum casing pressure	50m	


MATERIALS OF CONSTRUCTION

Part	Material
Impellers	Glass filled polycarbonate
Pump casing	Glass filled noryl
Seal ring (stationary)	Ceramic
Seal ring (rotating)	Carbon
Shaft	304 stainless steel
Seal elastomer	Nitrile rubber
Pump o-rings	Nitrile rubber
Motor shell	Aluminium
Shell finish	Baked enamel
Motor mounting feet	Xenoy® plastic
Motor through bolts	304SS with brass nuts
Motor fan	Polypropylene

INSTALLATION & PRIMING

- Installation with suction lift require a good quality foot valve to avoid loss of prime.
- To prime, fill pump body and suction line through priming plug hole located above suction inlet and replace plug.


HYDRAULIC PERFORMANCE

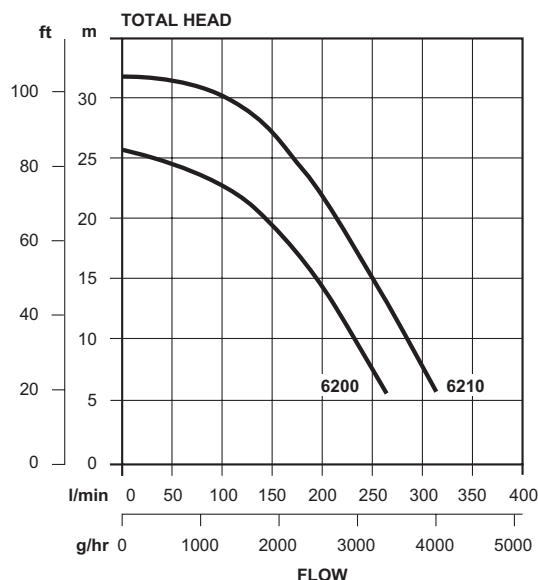

ELECTRICAL DATA

ELECTRICAL DATA			
Type	62001	62101	62103Ø
Supply voltage	220-250	220-250	380-415
Supply frequency	50Hz		
Phase	Single		Three
Full load current	6.8A	9.2A	3.7A
Locked rotor current	27A	40A	24A
Input power	1.5kW	2.1kW	2.1kW
Output power	1.0kW	1.6kW	1.8kW
Insulation	Class F		
Starting	P.S.C.	P.S.C.	DOL
IP rating	IP56		
AS/NZS 60335.1-2002 Approval No. TUV16025E			

DIMENSIONS

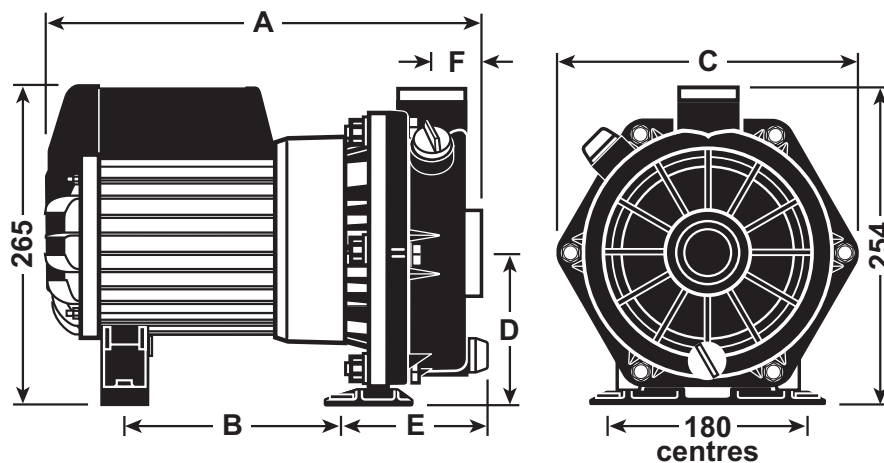

Type	A	B	C	D	E	F	Mounting holes diameter (mm)	Inlet B.S.P.	Outlet B.S.P.	Net Weight (kg)
6200	345	175	250	124	113	40	10	1½"F	1¼"F	16.5
6210	395	195	250	124	113	40	10	1½"F	1¼"F	19.0
62103Ø	395	195	250	124	113	40	10	1½"F	1¼"F	19.0

All dimensions in mm unless otherwise stated.

davey.com.au | daveynz.co.nz

This literature is not a complete guide to product usage. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice.
© Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2013.