

SPECIFICATIONS AND PERFORMANCE

2" BSP (50mm) POLYPROPYLENE / PVDF



MOCs Also Available: SS 316, AL, CI

8

- Max Flow Rate:** 586Lpm (155gpm)
- Port Size:**
 - Inlet:** 50.80mm (2" BSP)
 - Discharge:** 50.80mm (2" BSP)
 - Air Inlet:** 12.70mm (1/2" BSP)
 - Air Exhaust:** 19.05mm (3/4" BSP)
- Suction Lift:**
 - Dry:** 4.57m (15')
 - Wet:** 7.62m (25')
- Teflon:**
 - Dry:** 3.05m (10')
 - Wet:** 6.09m (20')
- Max Particle Size (Dia):** 6.35mm (0.250")



AOD 500 PP Bolted



AOD 50 PP Clamped

CLAMPED model available for specific applications

ALSO AVAILABLE IN PVDF



AOD 500 PVDF Bolted




AOD 50 PVDF Clamped

CLAMPED model available for specific applications

PERFORMANCE

AOD 50/500 | 2" (50mm)

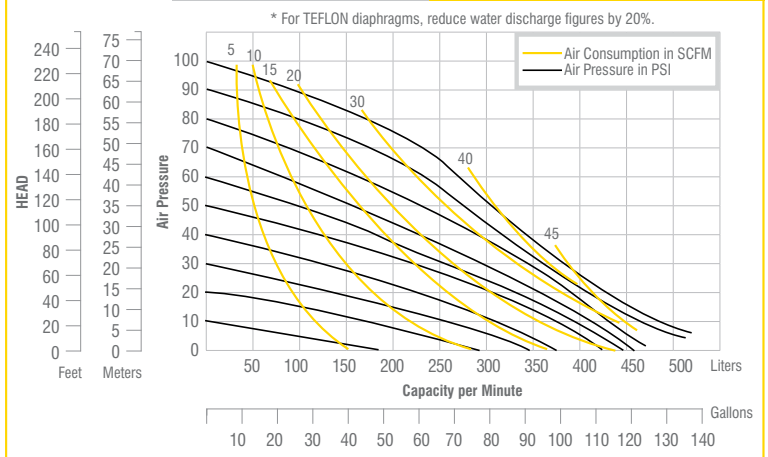

- PRICE ADD-ON ACCESSORIES:** Suction Hoses • Delivery Hoses • Air Inlet Connectors • P U Tubing • FRL (Filter Regulator Lubricator) • Needle Valves • Flange Connections • Drum Pump Kit • Hose Clips • Vibration Dampner (Foot Mounted) • Strainers • Air Outlet Mufflers • Pulsation Dampners •